




Use and movement areas

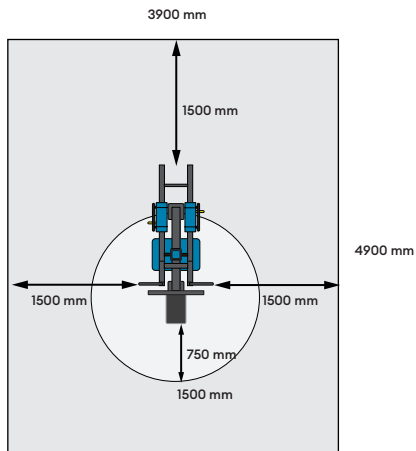

Target muscles



Foundation



1. For example artificial turf or moldable safety platform max. 40 mm
2. Concrete min. 120 mm below equipments
3. Ground frost insulation, thickness based on the ground


Concrete casting and positioning

Length 2500 mm

Width 1000 mm

Thickness 120-150 mm

- Ground frost insulation
- Rebaring
- Adequate drying time must be ensured

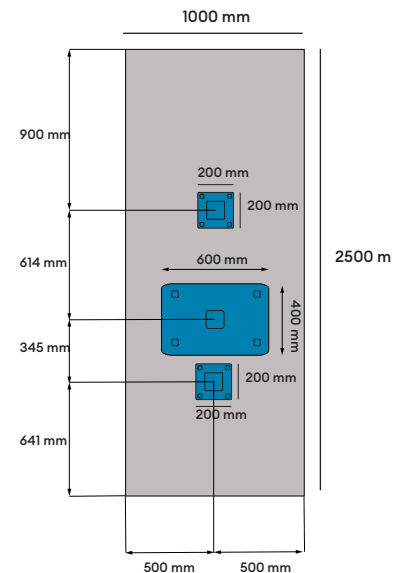

Product specification

Length	2000 mm
Width	1100 mm
Height	2015 mm
Equipment weight	170 kg (1 x weight unit) 228 kg (2 x weight unit)
User height	+ 140 cm
Age	+ 14
Safety area	19,5 m ²
Base	surface mounting to concrete
Standard	EN16630
Country of manufacture	Finland
Metal parts	steel
Tube strengths	4-6 mm
Coating solution	Zink and powder coating

Details

- Adjustable loading
- Maintenance-free polymer bearings
- 10-50 kg (1 x weight unit)
- 20-100 kg (2 x weight units)
- The product comes in RAL Classic colour 5012 (blue) as standard. RAL Classic colours 1017 (yellow), 3020 (red), 6018 (green) and 7036 (grey) are available at an additional cost.

Important

Installation depth for all Omnigym® units: top surface of the concrete base on the ground level or max. -40 mm allowance for the surface material to be used. (See foundation figure)

